


HL-SD HYDRAULIC POWER UNIT MOTOR MOUNTED

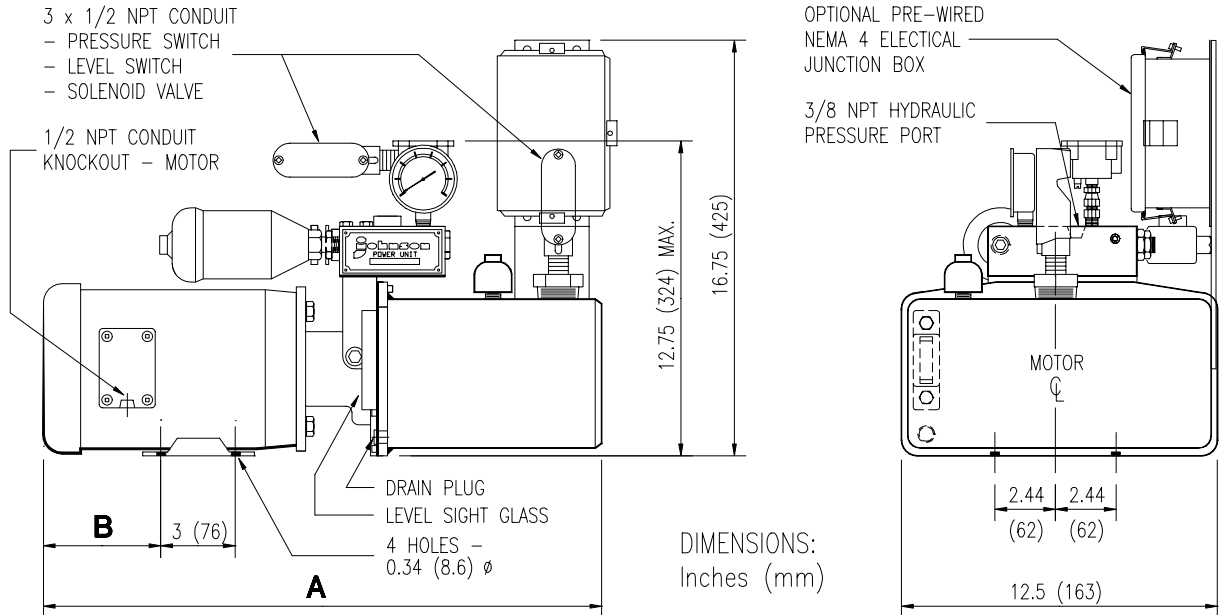

SPECIFICATIONS

| MODEL NO. | FREE FLOW usgpm/lpm | TANK CAPACITY usg/l | MOTOR hp/kw | DIMENSIONS in./mm | | WEIGHT lb/kg |
|-----------|------------------------|------------------------|----------------|----------------------|------------|-----------------|
| | | | | A | B | |
| HLO45SD | 0.45 1.70 | 1 4 | 0.5 0.37 | 18.5 470 | 3.63 92 | 62 28 |
| HL082SD | 0.82 3.10 | 1 4 | 0.75 0.56 | 18.5 470 | 3.63 92 | 65 30 |
| HL112SD | 1.12 4.24 | 2 6 | 1.0 0.75 | 22.5 572 | 4.5 114 | 74 34 |
| HL164SD | 1.64 6.21 | 2 6 | 1.5 1.12 | 22.5 572 | 4.5 114 | 77 35 |
| HL216SD | 2.16 8.18 | 3 11 | 2.0 1.49 | 26.5 673 | 5.5 140 | 87 40 |
| HL283SD | 2.83 10.7 | 3 11 | 3.0 2.24 | 27.5 698 | 6.5 165 | 98 45 |
| HL556SD | 5.56 21.05 | 4 15 | 5.0 3.73 | 31.5 800 | 6.5 165 | 125 57 |

- STANDARD MOTORS ARE 1725 RPM TEFC, 230/460V3PH60HZ AND 380V3PH50HZ
- MAXIMUM OPERATING PRESSURES: 1200 PSI (8.27 MPa) CONTINUOUS OR 1500 PSI (10.34 MPa) INTERMITTENT
- WEIGHTS ARE WITHOUT OIL IN TANK AND WITH 3PH TEFC MOTOR
- THE ABOVE SPECIFICATIONS ARE FOR REFERENCE AND ESTIMATING PURPOSES ONLY AND MAY BE CHANGED WITHOUT NOTICE
- CERTIFIED DRAWINGS ARE AVAILABLE UPON REQUEST OR UPON RECEIPT OF A PURCHASE ORDER
- ASSISTANCE IS OFFERED IN THE SELECTION OF THE APPROPRIATE POWER UNIT FOR ANY SPECIFIC APPLICATION

Johnson industries / elevanja ltd

Vancouver BC Canada -- Tel: 604 940 4555 Fax: 604 940 4565
 Toronto ON Canada -- Tel: 416 213 9991 Fax: 416 213 9992
 Bridgwater SOM England -- Tel: 01278 456411 Fax: 01278 429949

**HL-SD HYDRAULIC POWER UNIT
SERIES HL-SD**

BY: ST/MF/GS

DATE: 92/01/14

DWG. NO.

SC: NTS

REV.: 92/10/05

HLSDU-01.1

PATH: pru/sls/hlstd