

Motor Series DR.. Modular AC Motors and Brakemotors

The low-inertia rotor design of SEW's squirrel-cage AC motor and brakemotor of the DR.. series provides outstanding system stability, tight control, and high-cycling capacity. In many cases, its high performance allows it to replace a servo motor.

With a patented dual coil design and specialized rectifiers, its fail-safe brake delivers extremely fast stopping and starting times with minimal drift. Moreover, its low-noise operation and quiet braking make it perfectly suited for theater applications.

Every motor frame is available with multiple brake sizes to optimize cost. Select higher torque for a stopping brake or lower torque for a VFD holding brake. Its various connector options make the motor especially suitable for automotive manufacturers.


Standard Features

- 0.25 to 300 HP
- Inverter duty; meets or exceeds NEMA MG1, part 30/31
- Speed range: 10-60Hz (1:6), constant torque with standard cooling fan, 1.0 SF, 4-pole, 40°C max
- Continuous duty, TEFC
- 1.15 Service Factor @ constant speed
- Low rotor inertia - high cycling, tight control
- IE1 (<1.0 HP), IE2 (High), or IE3 (Premium) efficiency
- Connection terminals
- Double sealed or shielded bearings lubed for life
- Stainless steel nameplate
- UR, CSA Energy Efficient verified, CE



Mounting Styles

- Integral - for SEW gear units
- IEC flange
- IEC foot mount
- NEMA C-Face flange (size 56C - 254TC) - 4 pole

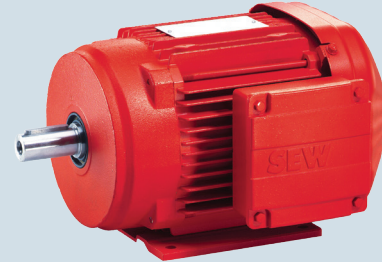

Insulation System

- Phase insulators - prevents phase-to-phase shorts
- Class H insulation
- Slot liners - prevents winding-to-ground shorts
- Wire sleeves
- Voltage spike resistant per NEMA MG1-31.4.4.2, which states 1600 V peak at .1µs or larger rise time

Optional Features

- 50Hz, 60Hz, or 50/60Hz global motor
- High cycling, fail-safe brake
- Two or more brake sizes per motor
- Backstop
- Encoder - built-in or externally mounted
- IP55, IP65, IP56, and IP66 ingress protection
- OS2, OS4 external protection (see back)
- Encapsulated stator (< 10 HP)
- Food Industry Option Package (IO1) + 2 year warranty
- Forced cooling fan for low frequency operation
- Thermostats, thermistors, KTY temperature sensors
- Low noise fan cover
- MOVIMOT® integrated frequency inverter
- Plug connectors for quick disconnect
- Cast iron high inertia fan or aluminum fan
- Hazardous Location certified to CSA LR94634: Class I Div 2 Grps A-D, Class II Div 2 Grps F&G

U.S. Operations:

Midwest Region

SEW-Eurodrive, Inc.
2001 West Main Street
Troy, OH 45373
Telephone: (937) 335-0036
Fax: (937) 332-0038
cstroy@seweurodrive.com

Northeast Region

SEW-Eurodrive, Inc.
2107 High Hill Road
Bridgeport, NJ 08014
Telephone: (856) 467-2277
Fax: (856) 845-3179
csbridgeport@seweurodrive.com

Southeast Region

SEW-Eurodrive, Inc.
1295 Old Spartanburg Hwy.
Lyman, SC 29365
Telephone: (864) 439-7537
Fax: (864) 439-7830
cslyman@seweurodrive.com

Southwest Region

SEW-Eurodrive, Inc.
3950 Platinum Way
Dallas, TX 75237
Telephone: (214) 330-4824
Fax: (214) 330-4724
csdallas@seweurodrive.com

Western Region

SEW-Eurodrive, Inc.
30599 San Antonio Street
Hayward, CA 94544
Telephone: (510) 487-3560
Fax: (510) 487-6433
cshayward@seweurodrive.com

www.seweurodrive.com

Nomenclature

DRS..	IE1 efficiency; NEMA MG1, Table 12-11
DRE..	IE2 efficiency; NEMA MG1, Table 12-11
DRP.. or DRN..	IE3 efficiency; NEMA MG1, Table 12-11
/AC../AS../AM..	Connectors
/A_7Y or /A_7W	SSI or RS-485 absolute encoder
/AL	Aluminum fan (cold environment)
/BE	Brake
/C	Canopy on fan guard
/DH	Condensation drain hole
/E_7C	HTL encoder
/E_7R	TTL (RS-422) encoder
/E_7S	Sin/cos encoder
HF	Brake Screw Release
HR	Brake Hand Release
/LF	Air filter
/LN	Low noise fan guard
/MM..D	MOVIMOT® inverter
/RS	Backstop
/TF	Thermistor (PTC) thermal protection
/TH	Thermostat thermal protection
/U	Non-ventilated (no fan)
/V	Separately wired cooling fan
/Z	Flywheel fan, cast iron
/2W	Extended shaft @ end of motor

About SEW-Eurodrive

Our product is motion. Our focus is solutions. As a worldwide supplier of innovative gearing, motor, and electronic drive technology, we have been solving problems in large and small applications within virtually every industry for over 80 years.

We also specialize in reducing the total cost of ownership with our customer-specific energy saving solutions.

OS Surface Protection

OSG	Dip Primer Acrylic Primer	Not a finish coat. User should apply additional coating
STD	Dip Primer Acrylic Top Coat	Indoors - clean atmosphere, heated buildings Ex: automobile industry, shops, airports
OS2	Dip Primer Acrylic Primer Acrylic Top Coat +UV	Outdoors - low pollution, rain Indoors - unheated with humidity, condensation, splashing water Ex: water treatment facility, amusement parks
OS4	Dip Primer Epoxy Primer Polyurethane Top Coat Polyurethane Clear Coat +UV	Outdoors - high pollution or salinity Indoors - pressure spray, chemical wash, brine Ex: breweries, food processing, chemical plants, dairies, outdoor coastal areas

Globally, we have assembly centers in 44 countries, along with 15 production plants. Therefore, we are able to provide uniform quality standards and international application experience.

Locally, we provide final assembly and custom modifications plus assistance with project planning, startup, and training. All products are backed by our industry-leading 24/7 support program.

SEW-Eurodrive ... Driving the World